

HALF STEP SECURITY FIXING KIT

GORDON ELLIS & CO

SUITABLE FOR:
DERBY HALF STEP
 66091 + 66092
LANGHAM HALF STEP
 LP/PHS



SEE INSIDE AND REVERSE FOR FITTING INSTRUCTIONS
 AVAILABLE IN THE FOLLOWING LANGUAGES: EN



ANY SERIOUS ACCIDENT OCCURRING THROUGH USE SHOULD BE REPORTED TO THE MANUFACTURER



DESIGNED AND MADE IN THE UK



IFU-REF 61095/0121-1

PART REF 61095

HALF STEP SECURITY FIXING KIT

GORDON ELLIS & CO

SUITABLE FOR:
DERBY HALF STEP
 66091 + 66092
LANGHAM HALF STEP
 LP/PHS



SEE INSIDE AND REVERSE FOR FITTING INSTRUCTIONS
 AVAILABLE IN THE FOLLOWING LANGUAGES: EN



ANY SERIOUS ACCIDENT OCCURRING THROUGH USE SHOULD BE REPORTED TO THE MANUFACTURER




DESIGNED AND MADE IN THE UK



IFU-REF 61095/0121-1

PART REF 61095



KIT CONTENTS:
 TWO METAL FIXING BARS
 TWO NUTS




PLEASE READ THESE INSTRUCTIONS ALONG WITH THE INSTRUCTIONS INCLUDED WITH THE HALF STEP.

ENSURE THE STEP IS STABLE BEFORE USE.

PERIODICALLY CHECK AND RE-TIGHTEN ALL NUTS AND OTHER FIXINGS AS REQUIRED.

WHEN FITTED, THE DISTANCE FROM THE UNDERSIDE OF THE STEP TO THE END OF THE FOOT MUST BE NO MORE THAN 3.8CM (6CM FOR 66092)



KIT CONTENTS:
 TWO METAL FIXING BARS
 TWO NUTS




PLEASE READ THESE INSTRUCTIONS ALONG WITH THE INSTRUCTIONS INCLUDED WITH THE HALF STEP.

ENSURE THE STEP IS STABLE BEFORE USE.


PERIODICALLY CHECK AND RE-TIGHTEN ALL NUTS AND OTHER FIXINGS AS REQUIRED.

WHEN FITTED, THE DISTANCE FROM THE UNDERSIDE OF THE STEP TO THE END OF THE FOOT MUST BE NO MORE THAN 3.8CM (6CM FOR 66092)

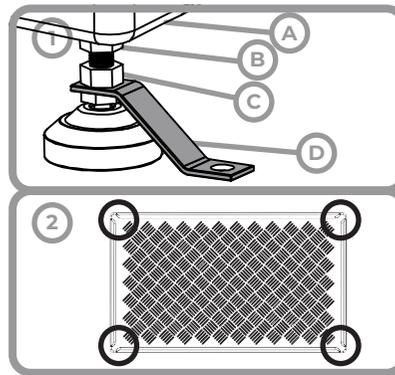


1. FIXING INSTRUCTIONS:
 REMOVE FOOT FROM STEP (A). UNSCREW THE LOCKING NUT (B). PLACE THE ANGLED BAR (D) ONTO THE FOOT, THEN SCREW THE NUT (C) TIGHTLY AGAINST IT. SCREW ON THE LOCKING NUT (B). ENSURE THERE IS THREAD ABOVE THE LOCKING NUT. SCREW FOOT BACK INTO THE STEP (A).

2. IT IS ADVISED THAT THE HALF STEP IS FIXED TO THE FLOOR AT EACH CORNER.

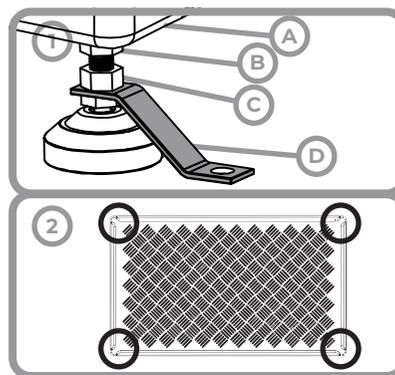

1. FIXING INSTRUCTIONS:
 REMOVE FOOT FROM STEP (A). UNSCREW THE LOCKING NUT (B). PLACE THE ANGLED BAR (D) ONTO THE FOOT, THEN SCREW THE NUT (C) TIGHTLY AGAINST IT. SCREW ON THE LOCKING NUT (B). ENSURE THERE IS THREAD ABOVE THE LOCKING NUT. SCREW FOOT BACK INTO THE STEP (A).


2. IT IS ADVISED THAT THE HALF STEP IS FIXED TO THE FLOOR AT EACH CORNER.

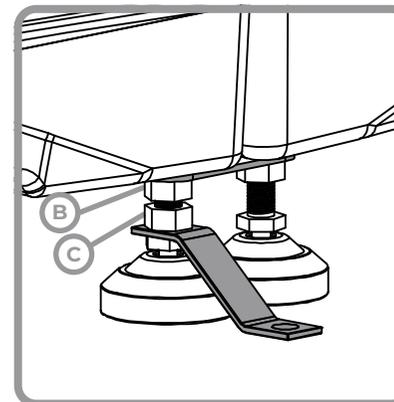

IF USING THE LINKING KIT AND FIXING KIT TOGETHER:

THE LINKING KIT GOES ABOVE LOCKING NUT (B)

THE FIXING KIT GOES BELOW BOTH NUTS (B+C)

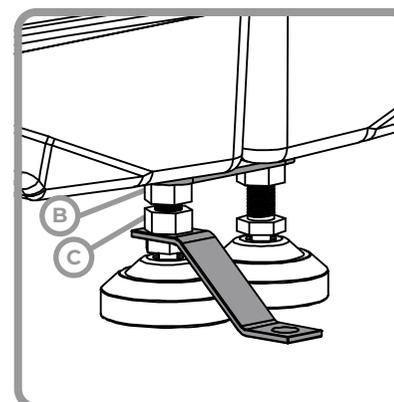

IF USING THE LINKING KIT AND FIXING KIT TOGETHER:

THE LINKING KIT GOES ABOVE LOCKING NUT (B)

THE FIXING KIT GOES BELOW BOTH NUTS (B+C)



GORDON ELLIS & CO.
 TRENT LANE
 CASTLE DONINGTON
 DERBY, ENGLAND DE74 2AT



GORDON ELLIS & CO

VIEW THE ENTIRE RANGE ONLINE AT
GORDONELLISHEALTHCARE.CO.UK
[f gordonellis.healthcare](https://www.facebook.com/gordonellis.healthcare) [@EllisHealthcare](https://twitter.com/EllisHealthcare)



GORDON ELLIS & CO.
 TRENT LANE
 CASTLE DONINGTON
 DERBY, ENGLAND DE74 2AT



GORDON ELLIS & CO

VIEW THE ENTIRE RANGE ONLINE AT
GORDONELLISHEALTHCARE.CO.UK
[f gordonellis.healthcare](https://www.facebook.com/gordonellis.healthcare) [@EllisHealthcare](https://twitter.com/EllisHealthcare)